



## CONSOLE EXTENDER CE252 Aten

Cena brutto	<b>1 174,65 zł</b>
Cena netto	<b>955,00 zł</b>
Dostępność	<b>Dostępny</b>
Numer katalogowy	<b>CE252</b>
Producent	<b>ATEN</b>


### Opis produktu



#### Cechy:

- "Console Extender" jest to urządzenie, które pozwala obsługiwać komputer z jednej lokalnej (local) konsoli (monitor, mysz, klawiatura) oraz z drugiej oddalonej (remote) nawet o 300 metrów.
- **Unikalną cechą jest Remote Unit z wbudowanym przełącznikiem KVM co daje możliwość podłączenia dodatkowego komputera obsługiwanego z jednej wspólnej konsoli.**
- Wbudowany układ ASIC do zaawansowanej kontroli błędów
- Przeznaczony dla konsol z myszą i klawiaturą PS/2
- Maksymalna rozdzielczość wynosi 2048x1536
- Manualna i automatyczna korekcja mocy sygnału w zależności od długości połączenia
- Połączenie między lokalną a zdalną stacją wykonane jest przewodem STP 5 kategorii (kabel nie jest dołączony i trzeba go wykonać we własnym zakresie o długości zgodnej z potrzebami) Racjonalnym sposobem jest połączenie poprzez niewykorzystaną linię istniejącej sieci.
- 

Do extendera można podłączyć przełącznik KVM. W takim układzie możliwa jest obsługa kilku komputerów (serwerownia) z oddalonego pomieszczenia.

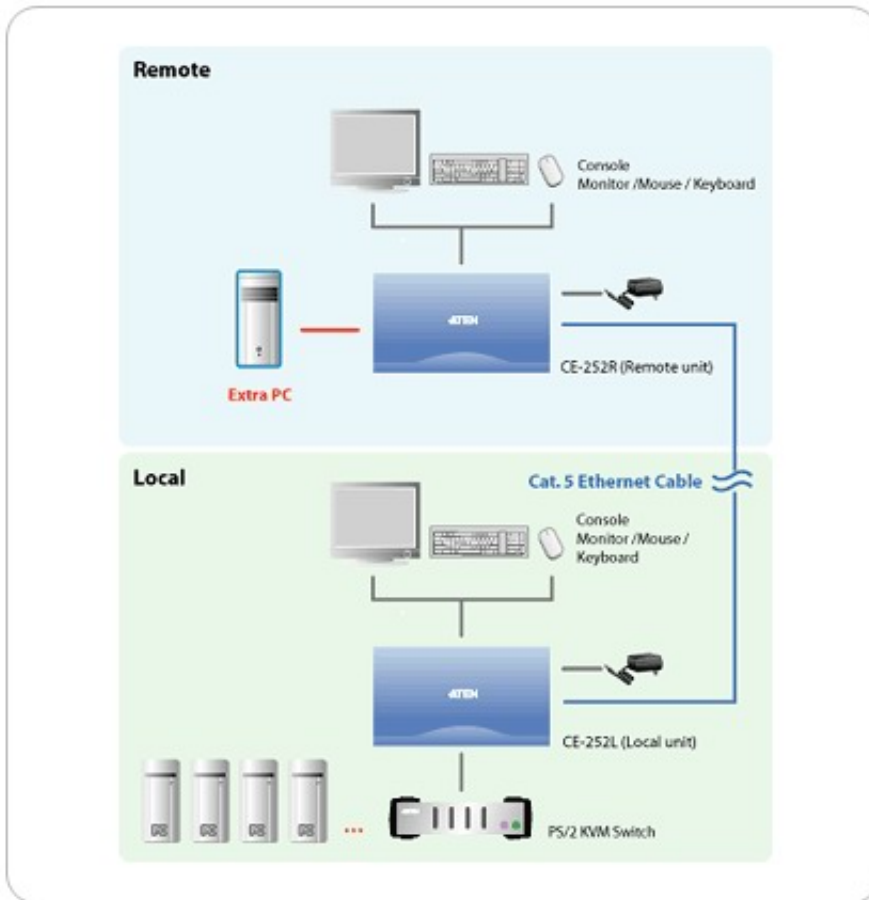

**Specyfikacja:**

Connectors	Console (Local)	Keyboard	1 x Min Din-6 Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x Min Din-6 Female (Green)
		Unit to Unit	1 x RJ45 Female (Black)
		Power	1 x DC Jack (Black)
	Computer	Keyboard/Mouse/Video	1 x SPHD-15 Female (Yellow)
	Console (Remote)	Keyboard	1 x Min Din-6 Female (Purple)
		Video	1 x HDB-15 Female (Blue)
		Mouse	1 x Min Din-6 Female (Green)
		Unit to Unit	1 x RJ45 Female (Black)
Power		1 x DC Jack (Black)	
LEDs (Local)	Local	1 (Green)	
	Remote	1 (Green)	

---

LEDs (Remote)	Local	1 (Green)	
	Remote	1 (Green)	
Switches	Selection Mode	1 Pushbutton	
Emulation	Keyboard	PS/2	
	Mouse		
Video		2048 x 1536 for Local computer	
		1600x1200 @ 500 feet 1024x768 @ 1000 feet	
Power Consumption	Local	DC 5.3V, 2.6W	
	Remote		
Environment	Operating Temperature	0°~50°C	
	Storage Temperature	-20°~60°C	
	Humidity	0~80% RH, NC	
Physical Properties	Housing	Metal	
	Weight	Local	0.4 kg
		Remote	
	Dimensions	Local	13.9 x 8.8 x 3.8 cm
Remote			