


Link do produktu: <https://dabe.pl/gniazdo-1xRJ45-ap-umj-kat5e-biale-telegartner-p-2285.html>



Gniazdo 1xRJ45 AP UMJ kat.5e białe Telegartner

Cena brutto	22,17 zł
Cena netto	18,02 zł
Dostępność	Dostępny
Numer katalogowy	J00023A0174
Producent	Telegartner

Opis produktu

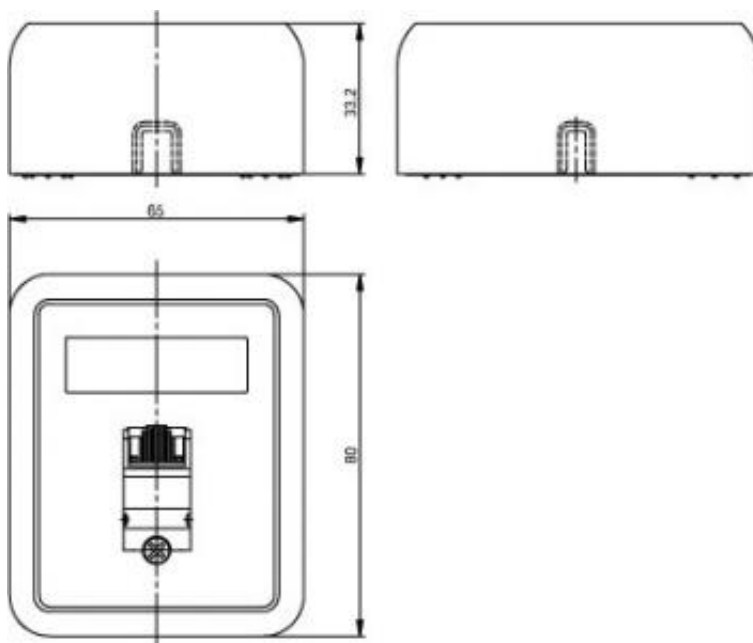

Gniazdo natynkowe 1 x RJ45 kat 5e. Kolor biały.

Specyfikacja:

Mechanical Characteristics

Insertion force

≤ 20 N

Life (mating cycles RJ45, RJ12, RJ11)

≥ 750

Material: housing

Material: housing VAD Ap Compact

Material: housing UMJ45

Material: insulators

Material: PCB

PA

PBT, ABS

FR4

Material: PCB finish	
Material: contact spring	CuSn, spring steel
Material: contact spring finish	min. 0,8 µm Au on 1,2 µm Ni
Material: contact IDC termination	CuZn
Material: IDC termination finish	
LSA Plus: Cu conductor diameter	solid 0,40 - 0,65 mm AWG 26/1 - AWG 22/1
LSA Plus: Wire diameter	0.7 - 1.6 mm
Electrical Characteristics	
Contact resistance	≤ 20 mΩ
Insulation resistance	≥ 500 MΩ
Voltage proof: contact-contact	≥ 1000 V, DC
Voltage proof: contact-shield	
Current carrying capacity at 50°C	1 A
PoE+ acc to IEEE 802.3at	Cat.6A
PoE according to IEEE802.3af	Cat.5e
Standards	
Connectors	IEC 60603-7-4 / -7-2
Transmission Characteristics	
10 Gigabit Ethernet acc. to IEEE 802.3an	for Cat.6A
Cat.6A	PL acc. to ANSI/TIA/EIA-568-B.2-10
Class EA	ISO/IEC 11801:2002 FPDAM2:2009; ISO/IEC 11801:2002+A1:2008
Cat.6	ISO/IEC 11801:2002, EN 50173-1:2007
Class E	ISO/IEC 11801:2002, EN 50173-1:2007
Channel Class E	ISO/IEC 11801:2002, EN 50173-1:2007
Gigabit Ethernet acc. to IEEE 802.3	Adequate for Gigabit Ethernet
Cat.5e	ISO/IEC 11801:2002, EN 50173-1:2007
Cat.3	